
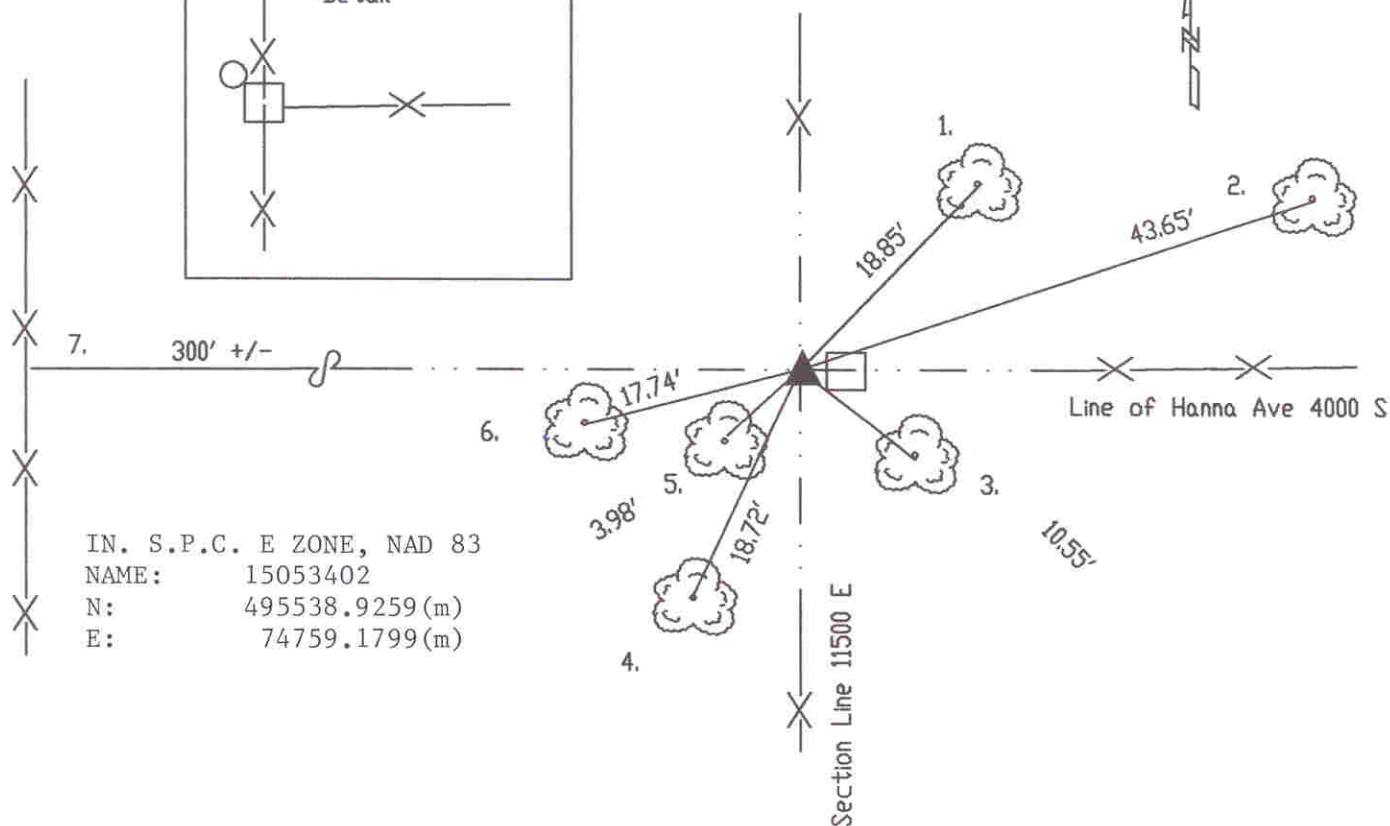
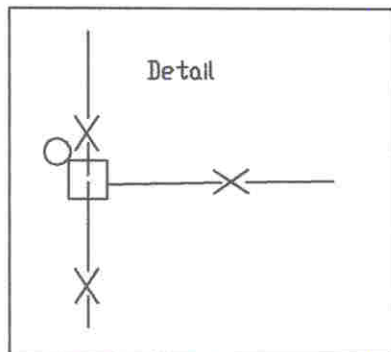


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 34 TOWNSHIP 15 RANGE 5
DATE: 1-27-99
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: 1" iron pipe: See detail
METHOD OF ESTABLISHMENT: County: 10-13-94

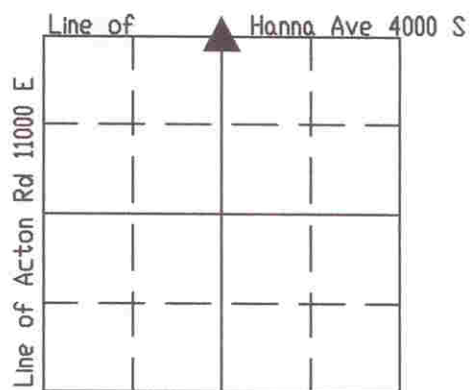

IN. S.P.C. E ZONE, NAD 83
NAME: 15053402
N: 495538.9259(m)
E: 74759.1799(m)

Original wooden post set 1820 by Hendricks with witnesses: 5" hickory N 84 E 19 links, 24" hackberry S 70 W 29 links per Marion County Atlas pg. 14. Hendricks also measured North line to be 79.72 chains. Hosbrook 9- 2 & 3- 1856 called corner 40.06 chains E of the SW of 27-15-5 and 40.18 chains W of the SE of 27-15-5. No monument was called per Franklin Township Legal Survey Book pg. 6. Extensive traversing and with testimony of the adjoining landowners this corner was re-established in the Fall of '87. Re-tied 2-29-88. Re-tied 1-27-99 by Wilcoxon.

SC553402

REF.	DISTANCE	DESCRIPTION
1.	18.85'	Railroad spike E 8" ash 24"up
2.	43.65'	Railroad spike w/washer SE 18" oak spur root
3.	10.55'	Railroad spike S 36" ash 60"up
4.	18.72'	Railroad spike E 8" hackberry 12"up
5.	3.98'	Nail in aluminum NE 48" oak stump spur root
6.	17.74'	Railroad spike NE 6" hackberry 24"up
7.	300'+/-	Due W to farm fence line